



Unigrip

Universal precision electromagnetic chuck with continuous transverse poles for modern grinders Type UG

Maximum grinding accuracy on the chuck

- Less than 5°C chuck temperature change after 1 hour working
- Minimum mechanical deformation with solid one-piece housing
- Uniform magnetic force distribution with specially developed rigid top laminations
- Minimum power consumption

Maximum grinding efficiency


- Full magnetic surface offering ease operation
- Versatile clamping, excellent holding on a broad range of workpiece sizes
- Possibility to combine several chucks for a large uninterrupted surface
- Low profile for more wheel head clearance






Unigrip

- Normal input voltage 110 VDC
- Back and end workstop rail
- Minimum 3 meter power cable

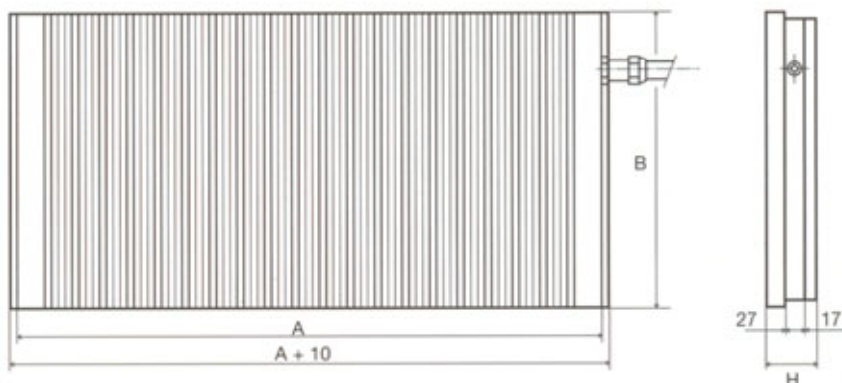

Code	A mm	B mm	H mm	P W	Weight kg
46.77.164	500	300	73	100	90
46.77.166	600	300	73	130	108
46.77.168	700	300	73	170	125
46.77.170	800	300	73	150	144
46.77.172	900	300	73	210	162
46.77.174	1000	300	73	235	180
46.77.178	1200	300	73	248	216
46.77.184	1500	300	83	283	300
46.77.204	600	350	73	170	112
46.77.206	700	350	73	185	131
46.77.212	1000	350	73	255	187
46.77.244	600	400	73	200	122
46.77.246	700	400	73	258	142
46.77.247	750	400	73	240	153
46.77.248	800	400	73	226	163
46.77.250	900	400	73	310	183
46.77.252	1000	400	73	280	203
46.77.256	1200	400	73	404	270
46.77.262	1500	400	83	428	337
46.77.268	2000	400	83	520	449
46.77.322	600	500	73	233	157
46.77.324	700	500	73	280	184

Code	A mm	B mm	H mm	P W	Weight kg
46.77.325	750	500	73	285	197
46.77.326	800	500	73	272	210
46.77.328	900	500	73	369	236
46.77.330	1000	500	73	330	262
46.77.334	1200	500	73	469	348
46.77.335	1250	500	73	425	362
46.77.336	1300	500	83	415	466
46.77.338	1400	500	83	510	502
46.77.340	1500	500	83	552	434
46.77.350	2000	500	83	654	578
46.77.355	2500	500	83	883	897
46.77.404	800	600	73	266	260
46.77.408	1000	600	73	306	325
46.77.412	1200	600	73	430	430
46.77.413	1250	600	73	455	406
46.77.418	1500	600	83	540	538
46.77.428	2000	600	83	607	717
46.77.530	1500	700	83	630	628
46.77.561	800	800	73	405	347
46.77.565	1000	800	73	490	433
46.77.570	1250	800	73	780	542
46.77.578	2500	800	83	1560	1084



control units	
P ≤ 350 W	P > 350 W
VUE 360 - 110	VUE 850 - 110

